



vulcan[®] 714Strip


Key performance

- Specifically designed for strippable and varnishing applications
- Smooth varnish laydown
- Easy to strip due to the special compressible layer
- Excellent ink transfer and high resistance to ink pick up
- Suitable for flood, spot, knock out coating applications

MAIN APPLICATION

Coating

Vulcan 714Strip is available in 4-ply, (1,96 mm) thickness.

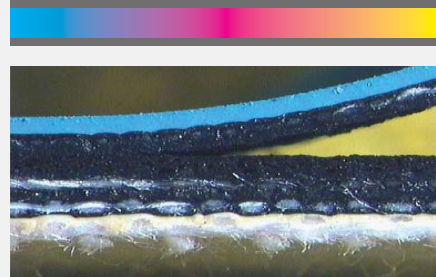

Vulcan 714Strip

✓ The product at a glance

INK COMPATIBILITY	Conventional
PRINTING SURFACE COLOUR	Blue
THICKNESS (mm)	1,96
AVERAGE LOAD VALUE N/cm² @ 0,23 mm Indentation	250
SURFACE ROUGHNESS (Ra micron)	0,6
ELONGATION (%)	<0,9
TENSILE STRENGTHS (N/mm)	>60
WATER & SOLVENT PROTECTION	No
ADDITIONAL INFORMATION	
ADDED FEATURES	Suitable for coating also on packaging applications

**FOR ANY FURTHER DETAILS AND FOR A QUOTATION
PLEASE REFER TO YOUR SALES MANAGER
OR EMAIL US AT: printing@trelleborg.com**