



Rollin® Graffity


Key performance

- High print quality
- Excellent half tone reproduction
- Easy machine set up
- Blanket excellent washability

MAIN APPLICATION

Commercial Shetfeed,
Packaging

Rollin Graffity is available in 3-ply, (1,96 mm) thickness.

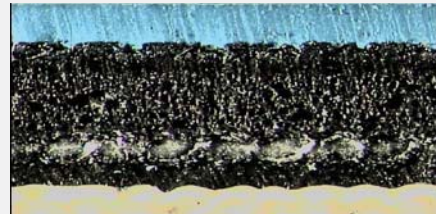

Rollin Graffity



The product at a glance

INK COMPATIBILITY	Hybrid
PRINTING SURFACE COLOUR	Dark blue
THICKNESS (mm)	1,96
AVERAGE LOAD VALUE N/cm2 @ 0,23 mm Indentation	250
SURFACE ROUGHNESS (Ra micron)	1,0
ELONGATION (%)	<0,9
TENSILE STRENGTHS (N/mm)	>60
FEED FEATURES	Slightly Positive
WATER & SOLVENT PROTECTION	Yes
ADDITIONAL INFORMATION	
APPLICATIONS	Suitable also for packaging applications

**FOR ANY FURTHER DETAILS AND FOR A QUOTATION
PLEASE REFER TO YOUR SALES MANAGER
OR EMAIL US AT: printing@trelleborg.com**